


Features:

- 7-inch touch LCD screen
- Visible light facial recognition
- Anti-spoofing algorithm against print attack (laser, color and B/W photos), videos attack and 3D mask attack
- Multiple Verifications: Face / fingerprint / card / password
- 125KHz ID card (EM) /13.56MHz IC card and fingerprint optional
- Supplement light with adjustable brightness
- 10,000 face templates capacity

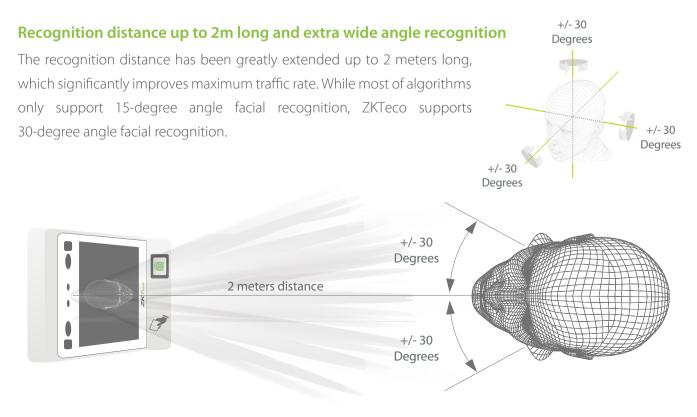

Specifications:

Display	7-inch Touch Screen
Face Capacity	10,000
Fingerprint Capacity	10,000 (Optional)
Card Capacity	10,000 (Optional)
Transactions	200,000
Operation System	Linux
Standard Functions	ADMS, T9 Input, DST, Camera, 9-digit User ID, Acess Levels, Groups, Holidays, Anti- passback, Record Query, Tamper Switch Alarm, Multiple Verify Modes
Hardware	900MHz Dual Core CPU Memory 512MB RAM / 8G Flash 2MP WDR Low Light Camera Adjustable Light Brightness LED
Communication	TCP/IP, WiFi (Optional), Wiegand i nput / output, RS485
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm output, Auxiliary Input
Optional Functions	125KHz ID card (EM) /13.56MHz IC card, Fingerprint
Facial Recongntion Speed	≤1s
Biometrics Algorithms	ZKFace V5.8& ZKFinger V10.0
Power Supply	12V 3A
Working Humidity	20%-80%
Working Temperature	0 °C- 45 °C
Dimensions (W*H*D)	91.93*202.93*21.5mm
Supported Softwares	ZKBioAccess

Dimensions(mm):

22.00

22.00





Optional Accessories:





Exit Button

-

Sensor

RFID Reader RS485 Fingerprint Reader




FP & RFID Reader (Optional)



Barrier Bracket (Optional)

Configuration:





Alarm

V1.2 2020.10.14